

1/4" Super Flexible jumper , NEX10M-4310F, 1m


Specifications :

Part No.	6008641001	
Item	Diameter(mm)	Material
Inner conductor	1.90±0.05	Copper clad aluminum wire
Insulation	4.80±0.10	Foamed polyethylene
Outer copper conductor	6.40±0.15	Helical corrugated copper tube
Jacket	7.50±0.20	LSZH B2ca

Jumper Cable Characteristic Chart

Characters	Specification		
Cable type	1/4"S (Black LSZH jacket.)		
Characteristic impedance	50±2Ω		
Insulation resistance	≥5000 MΩ·km		
Dielectric strength	2000 V(DC,1 min)		
Minimum bending radius	25(single)		
Frequency range	0~6GHz		
Return loss	Length	0.5-5m	5-8m
	DC-1GHz	>29	>27
	1.7-2.2GHz	>27	>25
	2.2-2.7GHz	>25	>23
	3.4-3.8GHz	>22	>21
PIM	-160dBc		
Operation temperature	-40-85°C		
Installation temperature	-25-60°C		
Storage temperature	-70-85°C		
Waterproof grade	IP68		
Environmental protection grade	RoHS 2.0		

Outline Drawing :

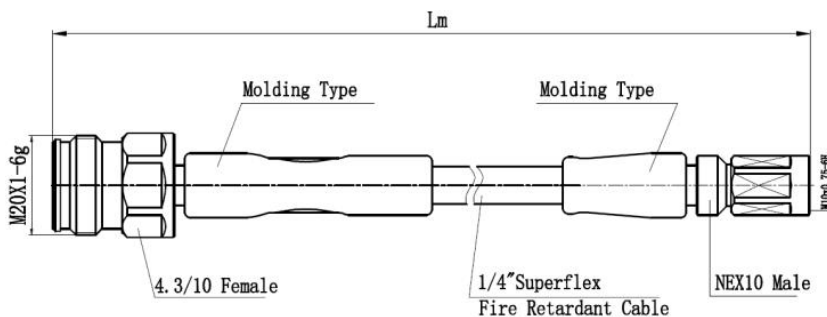

Product Image :

